



LUBING

Dirt removal belt

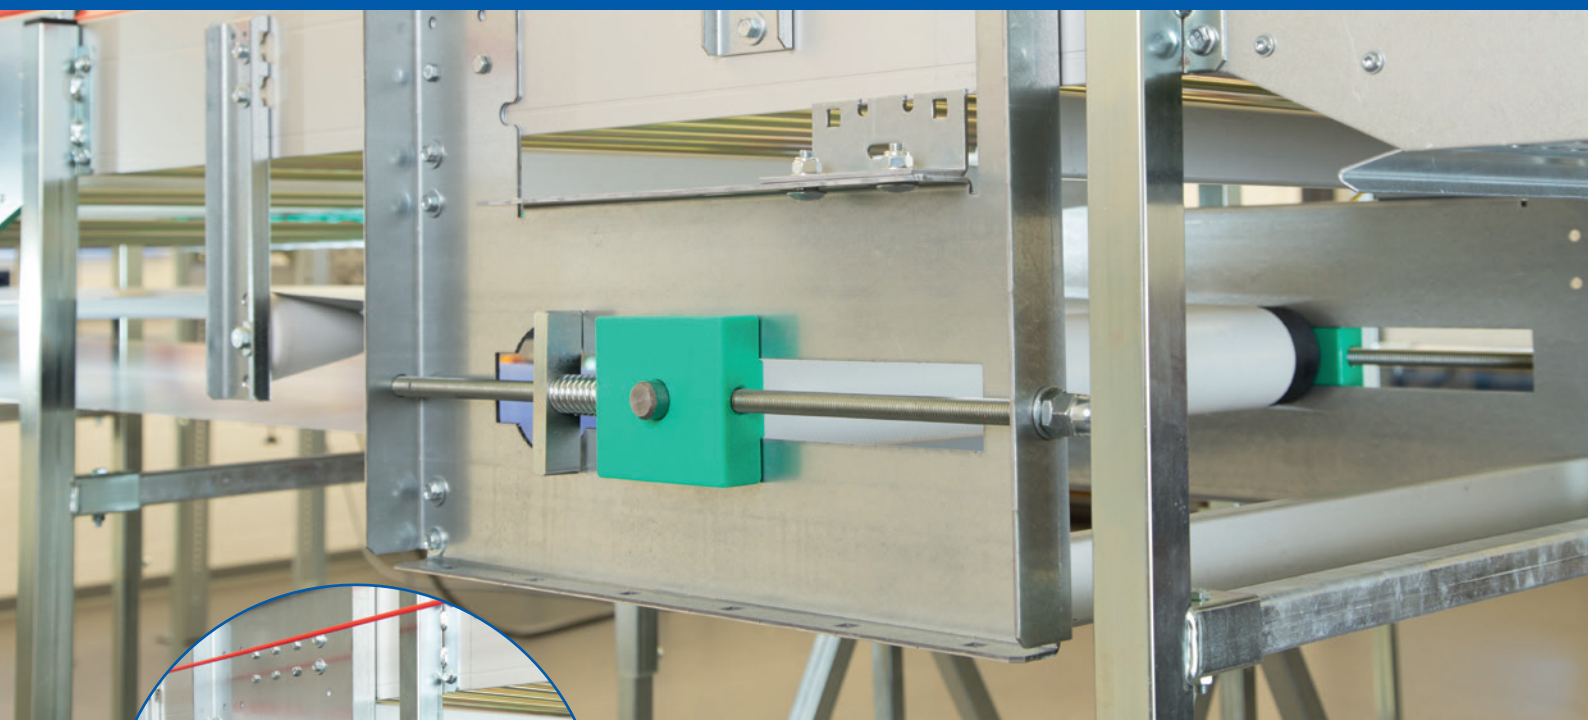


*for collecting dirt and
soft-shelled eggs
under the LUBING Conveyor-System*

Main facts at a glance: LUBING Dirt removal belt

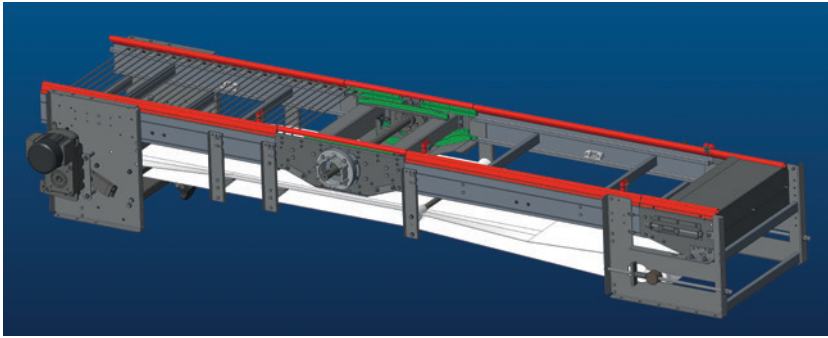

The LUBING Dirt removal belt for curve conveyors consists of the driving unit and the support brackets for the plastic fabric belt as well as the end unit. It can be installed easily into new and existing LUBING curve Conveyor-Systems. The dirt removal belt transports the soft-shelled eggs to the driving side and there they are removed by the integrated dirt scraper at a defined location.

Hereby an expensive purification of the floor or the dirt plates in the curve conveyor can be avoided.

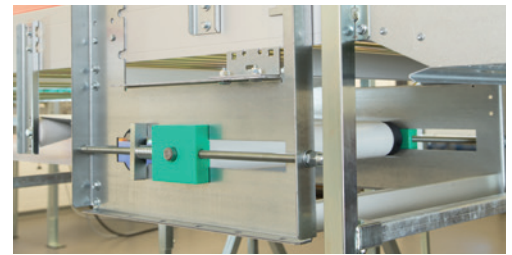

The Dirt removal belt is available for the following types of the curve conveyor:

Components	Type		
	350	500	750
Driving unit	187 006 20 00	185 006 20 00	188 006 20 00
Brackets for dirt removal belt	187 700 04 00	185 700 04 00	188 700 04 00
End unit	187 006 24 00	185 006 24 00	188 006 24 00
Plastic fabric belt	75 02 013	75 02 011	75 02 012
Motor 0,18 kW	50 03 012	50 03 012	50 03 012

Special voltage on request!

The speed of the Dirt removal belt is 3,9m/min.

For further information: www.lubing.com

Technical modifications reserved.

LUBING

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany)

Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33

www.lubing.com · info@lubing.com

**Drinking-Systems
Conveyor-Systems
Climate-Systems**